



Chemical Consultants INCORPORATED

SS-200

Graphic Press Wash / Spray & Wipe

GENERAL DESCRIPTION

SS-200 is designed for all inks, especially vinyl, water base, epoxy, plastisol, enamel and UV inks. This product will perform as a press wash when changing colors between jobs and/or as a screen opener for continuous printing. SS-200 will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary. SS-200 immediately liquifies the ink and dries quickly, leaves no film or oily residue.

ADVANTAGES

- Non-Flammable
- Fast Drying
- Emulsion safe
- High solvency
- Low Odor
- High load capacity to reduce usage
- Mesh Safe


Quick Tip:

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.


APPLICATION

First card excessive ink from the screen.

SS-200 can be applied manually with a rag, spray bottle, or pneumatic pump systems.

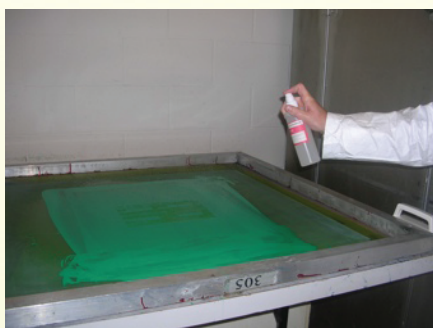

Step 1. Spray SS-200 on squeegee side of screen.

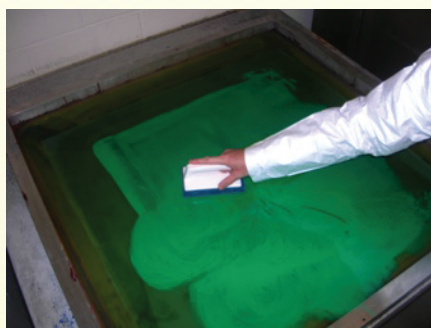

Step 2. Scrub ink with a non-absorbent pad until liquified.



Step 3. Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

Packaging

1 quart

1 gallon

5 gallon pail

30 gallon drum

55 gallon drum

1850 Wild Turkey Circle Corona, CA 92880 PHONE(951)735-5511 FAX(951)735-7999 www.ccidom.com