




*Innovation Excellence through  
Global Manufacturing and Distribution*

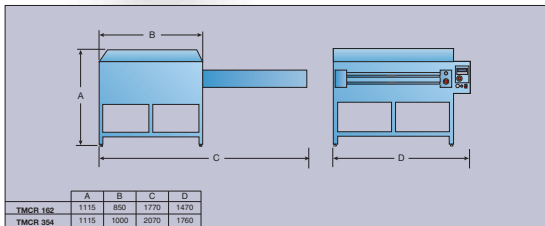

Dimension of the plate  
Current  
Power consumption  
Power consumption/h  
Temperature  
Time regulable  
Pressure (6 bar)  
Net weight

**TM 162**  
61x91,5 cm  
380V + N  
KW 4,5  
KW/h 2,5  
40 $\infty$ -285 $\infty$  C  
0-999,9 sec.  
500 gr/cm<sup>2</sup>  
Kg 300

**TM 354**  
76x122 cm  
380V + N  
KW 7,2  
KW/h 3,5  
40 $\infty$ -285 $\infty$  C  
0-999,9 sec.  
300-400 gr/cm<sup>2</sup>  
Kg 400

The AIT 162/35 CR is specially designed for high production dye-sub printing on cut fabric and rigid substrates. It also works well for the application of foils and other heat transfer applications for fabrics. A twin tray loading system greatly increases production because you can unload & load on one tray while the other is inside the press printing. Pressure is pneumatic and easily regulated. Temperature is regulated exactly on the whole plate with 3 zones of heat control. Double heating is optional for two sided printing.

#### OTHER STANDARD FEATURES:

- Digital time & temperature controls
- Piece counter



**Advanced Innovative Technologies, LLC**  
530 Wilbanks Drive, Ball Ground, GA 30107  
Tel. 770 479 1900 Fax: 770 479 4179

e-mail: [info@aitequipment.com](mailto:info@aitequipment.com)  
web: [www.aitequipment.com](http://www.aitequipment.com)

## 162/354 CR

THIS PRODUCT IS BROUGHT TO YOU BY



VISIT US ONLINE  
[SourceOne.Nazdar.com](http://SourceOne.Nazdar.com)

CALL US  
888-578-5713

© 2017 Nazdar. All Rights Reserved.  
Specifications subject to change without notice.