

G-COAT 406 - the attractive solution for automatic double-sided screen coating



G-COAT 406

Grünig

Grünig-Interscreen AG
Ringgenmatt 14
CH-3150 Schwarzenburg
Switzerland

Phone +41 31 734 2600
Fax +41 31 734 2601
www.grunig.ch
mail@grunig.ch

G-COAT 406

Automatic coating machine



Control panel



Coating carriage



Upper screen holder



Lower screen holder

The main features at a glance:

- Recently developed coating machine of extremely compact and low-maintenance construction type
- Single-Size device for screen formats of up to 700 x 1000 mm
- The PLUG & COAT system has been designed for trouble-free installation and commissioning: unwrap – set up – coat
- The machine has been constructed as a bench-top model; it can be operated on any work surface that offers sufficient stability.
- To make sure that the machine can also be set up on the floor, an easy-to-mount sub-construction is available as an option.
- The upper screen holder can easily and rapidly be adjusted within a range of 250 and 1000 mm, to cater to the various screen formats.
- The screen holders can be adapted to match frame profile thicknesses between 5-25 mm or 20-40 mm.
- All the pertinent coating parameters can be smoothly and easily programmed by means of the control panel.
- This machine provides for one-sided or double-sided simultaneous screen coating.
- To optimize the coating surface, the frame profile height can be adjusted within a range of 25 and 100 mm via a rotary knob on the control panel.
- The contact pressure and the trough tipping procedures are controlled by the pneumatic system.
- Extremely smooth operation of the coating carriage thanks to the use of special sliding guides and a special toothed belt drive unit.
- Safely reproducible coating results with direct coating wet-on-wet or during subsequent coating.
- Easy-to-use manual functions


Coating parameters

- Coating speed (15 - 65 mm/s)
- Number of coatings on squeegee side (0 - 10)
- Number of coatings on print side (0 - 10)
- Flow time (0 - 10 seconds)
- Frame profile height (25 - 100 mm)

Screen format	SB screen width	mm	max. 700
	SH screen height	mm	250-1000
	Frame profile height	mm	25-100
	Frame profile thickness	mm	5-40
Dimensions	Width	mm	1075
	Height	mm	1500
	Depth	mm	430
Power supply	Voltage	V	1x230+N+PE 1x110+N+PE
	Frequency	Hz	50/60
Permanent sound pressure level		dB (A)	< 70

Option U

- Sub-construction for mounting the machine on the floor. The height of the sub-construction is 540mm

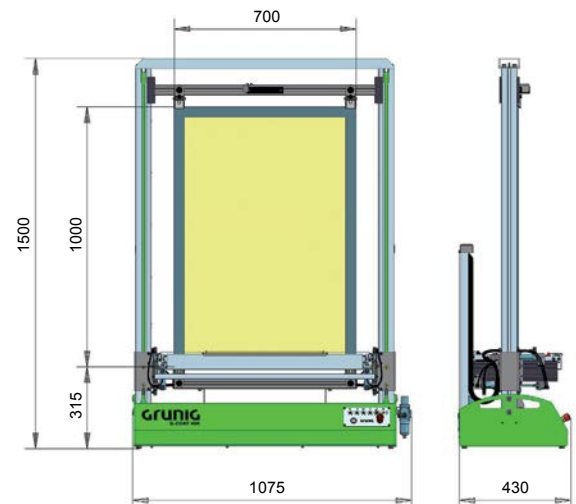

All measures in mm



The machine is in compliance with the EU machinery directives (CE conformity)

Technical changes are reserved

August 2017

THIS PRODUCT IS BROUGHT TO YOU BY

NAZDAR
SOURCEONE

VISIT US ONLINE
SourceOne.Nazdar.com

CALL US
888-578-5713

© 2022 Nazdar. All Rights Reserved.
Specifications subject to change without notice.