


PE Screenblock Tape

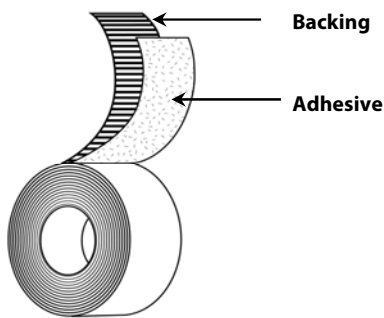

Backing: Polyethylene Film

Adhesive: Rubber

Liner: N/A

Colors: Red

Specifications: N/A

Standard Sizes: 48mm x 55m, 72mm x 55m

Applications

- Used to block screens from moisture and chemicals during screen printing.
- General purpose industrial bundling, patching, wrapping and repairing.

Features

- Polyethylene Film Backing
- Natural rubber based adhesive

Benefits

- Conformable and flexible
- Excellent durability & solvent resistance
- Red for high visibility
- High tack for a secure bond
- Repositionable & clean removal - no residue.

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	8 mils	203.2 mic	ASTM D-1000
Adhesion to Steel	60 oz/in	6.57 N/cm	PSTC-101
Tensile Strength	21 lb/in	36.78 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Elongation	70%		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
www.berryplastics.com

Nijverheidsstraat 10
 2260 Oevel (Westerlo) Belgium
 32-014-722500 Fax 32-014-722570
 6/29/2011