

“The Dawn Of A New Era”

AXEON™ UltraMix® 1200 Series Non-PVC Pantone® Color System


When Pantone® color matching is important, our AXEON™ UltraMix® 1200 Non-PVC, Non-Phthalate Pantone® Color System inks answer the call. The UltraMix® 1200 Color System is formulated to offer the same print and performance characteristics as our traditional plastisol inks.



AXEON™ UltraMix® 1200 Pantone® Non-PVC, Non-Phthalate Color System:

- Consists of 19 high performance colors, plus an extender base.
- Offers inks that are creamy, smooth and formulated for ultra high speed wet-on-wet automatic printing.
- Can be printed through standard and fine mesh counts, allowing printers to boost production speeds and overall efficiency without sacrificing quality.

AXEON™ UltraMix 1200 Series have received rave reviews from several large US and international printers who beta-tested the inks. “Amazing,” “fantastic” and “can I order now” were just some of the responses we received.

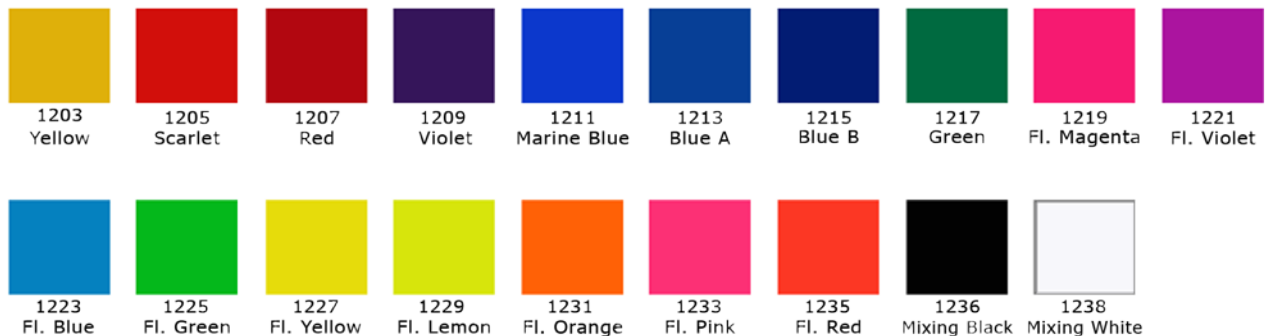

International Coatings • Ph (800) 423-4103 (within the U.S. only) or (562) 926-1010 • 13929 E 166th St, Cerritos, CA 90703
www.iccink.com • icinfo@iccink.com



**International
Coatings™**
Textile Screen Printing Inks

13929 E 166th St, Cerritos, CA 90703 • PH (800) 421-6971 or (562) 926-1010 • FAX (562) 926-9486 •
Email icinfo@iccink.com • www.iccink.com

REV. 1600002



AXEON™ UltraMix® 1200 SERIES NON- PVC COLOR SYSTEM



RECOMMENDED FABRICS

100% Cotton
50/50 Cotton/Polyester Blends




INK APPLICATION

1200 Series Colors should only be used with other 1200 Series Colors, without any modifications




ADDITIVES

If modification is necessary, use 1% to 5% by weight of 1610 Non-PVC Curable Reducer or 1200 Non-PVC Extender Base



SCREEN MESH

110-305 t/in (43-120 t/cm) monofilament



EMULSION

Any direct or indirect emulsion or capillary film in the 35 to 70 micron range



SQUEEGEE

65-70 Durometer
Sharp edge



CURE TEMPERATURES

325°F (163°C) entire ink film



CLEAN-UP

Any eco-friendly plastisol type screen wash



PRODUCT PACKAGING

Quart, 1 gallon, 5 gallon, 30 gallon or 50 gallon containers



STORAGE OF INK CONTAINERS

65° to 90°F (18°C to 32°C)
Avoid storage in direct sunlight
Keep containers well sealed



SDS

Refer to SDS prior to use

FEATURES

AXEON™ UltraMix® 1200 Series Non-PVC Pantone® Color System consists of 19 non-phthalate, non-PVC, high performance colors, plus an extender base, that is formulated for ultra high speed wet-on-wet automatic printing.

Create special or standard colors by using International Coatings' UltraMix®, Pantone® color matching software, either online or on the desktop version.

UltraMix® 1200 Series is RSL tested to meet and pass brand requirements.

COLORS

1200 Extender Base	1215 Blue B (RS)	1225 Fluorescent Green
1203 Yellow	1217 Green	1227 Fluorescent Yellow
1205 Scarlet	1236 Mixing Black	1229 Fluorescent Lemon
1207 Red	1238 Mixing White	1231 Fluorescent Orange
1209 Violet	1219 Fluorescent Magenta	1233 Fluorescent Pink
1211 Marine Blue	1221 Fluorescent Violet	1235 Fluorescent Red
1213 Blue A (GS)	1223 Fluorescent Blue	

SPOT FLASHING

AXEON™ UltraMix® 1200 Series inks will spot dry, with a very low after flash tack. Dwell time is dependent on the spot dryer used. In some cases, you may have to lower the heat of the spot cure unit because too much heat may actually make the ink tacky. When you spot dry, you are only partially fusing or gelling the surface of the ink. The ink should be just dry to the touch, with no lift-off, but not totally fused. Total fusing of any flashed color may cause inter-coat adhesion problems with the inks printed on top of the flashed ink. Final fusing or curing should occur in the dryer.

IMPORTANT INFORMATION

In order to achieve the best color matching results using the AXEON™ UltraMix® 1200 Series Pantone® Color System, the specified system primaries must be used. Using colors other than the specified primaries will produce inaccurate matching results.

Colors produced using the AXEON™ UltraMix® 1200 Series Pantone® Color System will vary in opacity. Colors will reproduce best on white or light colored fabrics. Colors may appear metameric (not match well) when viewed under different types of lighting.

Adding too much reducer or other additives to the 1200 Series inks may cause curing/fusing or increased dye migration problems.

Use an underbase print when printing 1200 Series inks onto dark fabrics. Use 1244 or 1248 white as an underbase ink. To achieve a softer hand and faster production speeds, print underbase ink through finer mesh counts (230 to 305 t/in or 90 to 120 t/cm mesh).

Always test print the fabric to be used before beginning production to see if the desired performance is obtained.

This ink and those in the AXEON™ product line are not formulated with PVC resins or phthalate plasticizers, nor are they intentionally added.

Care should be taken to not cross-contaminate the AXEON™ products with PVC or phthalate containing products.

Do not use standard plastisol curable reducers with this or any of the AXEON™ products.

LEGAL DISCLAIMER

Recommendations and statements made are based on International Coatings' research and experience. Since International Coatings does not have any control over the conditions of use or storage of the product sold, International Coatings cannot guarantee the results obtained through use of its products. All products are sold and samples given without any representation of warranty, expressed or implied, of fitness for any particular purpose or otherwise, and upon condition that the buyer shall determine the suitability of the product for its own purpose. This applies also where rights of third parties are involved. It does not release the user from the obligation to test the suitability of the product for the intended purpose and application.

REV. 1700001

13929 E. 166th St., Cerritos, CA 90703 • PH (800) 421-6971 or (562) 926-1010 • FAX (562) 926-9486 • E-mail icinfo@iccink.com • www.iccink.com

THIS PRODUCT IS BROUGHT TO YOU BY

NAZDAR
SOURCEONE

VISIT US ONLINE
SourceOne.Nazdar.com

CALL US
888-578-5713

© 2022 Nazdar. All Rights Reserved.
Specifications subject to change without notice.